

# Technical Data Sheet

## Optibelt ALPHA linear / V AT10 - RF Polyurethane Timing Belt, Optionally With Fabric PAZ/PAR, Thermoplastic PU, Open-Ended / Endless Joined




### Dimensions, Tolerances

Profile:	AT10
Tooth pitch t:	10 mm
Total thickness:	4.5 mm
Tooth height:	2.5 mm
Tooth tip width:	5.0 mm
Tooth flank angle:	50°
Length tolerance:	±0.5 mm/m
Width tolerance:	±0.5 mm
Thickness tolerance:	±0.3 mm

### Construction

Polyurethane:	Thermoplastic, 92 Shore A, white
Tension cord:	Stainless steel, Ø 0.9 mm
Fabric, optional:	Polyamide, tooth and back (PAZ/PAR), green

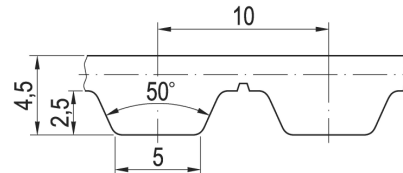

### Specific nominal tensile force transmittable per tooth

Input speed $n_1$ [1/min]	Spec. nom. tensile force $F_{N\ spez}$ [N/mm]	Input speed $n_1$ [1/min]	Spec. nom. tensile force $F_{N\ spez}$ [N/mm]	Input speed $n_1$ [1/min]	Spec. nom. tensile force $F_{N\ spez}$ [N/mm]
0	7.500	1200	4.734	3600	3.164
20	7.382	1300	4.627	3800	3.083
40	7.273	1400	4.527	4000	3.005
60	7.170	1500	4.432	4500	2.826
80	7.073	1600	4.343	5000	2.664
100	6.982	1700	4.259	5500	2.518
200	6.590	1800	4.178	6000	2.383
300	6.275	1900	4.102	6500	2.259
400	6.012	2000	4.029	7000	2.143
500	5.785	2200	3.892	7500	2.036
600	5.586	2400	3.766	8000	1.935
700	5.409	2600	3.649	8500	1.840
800	5.250	2800	3.540	9000	1.750
900	5.104	3000	3.437	9500	1.665
1000	4.971	3200	3.341	10000	1.584
1100	4.848	3400	3.250	$v_{max} = 60\text{ m/s}$	

### Nominal tensile force $F_N$

$$F_N = F_{N\ spez} \cdot z_{eB} \cdot b \quad [N]$$

$F_{N\ spez}$	Specific nominal tensile force transmittable per tooth [N/mm]
$z_{eB}$	Number of teeth in mesh, driver pulley, limited to $z_{eB\ max}$
$z_{eB\ max}$	ALPHA linear: 12, ALPHA V: 6
$b$	Belt width [mm]

### Nominal torque $M_N$

$$M_N = F_N \cdot d_{w1} / (2 \cdot 10^3) \quad [Nm]$$

$$d_{w1} = z_1 \cdot t / \pi \quad [mm]$$

$d_{w1}$	Pitch diameter, driver pulley [mm]
$z_1$	Number of teeth, driver pulley
$t$	Tooth pitch [mm]

### Nominal power $P_N$

$$P_N = F_N \cdot z_1 \cdot t \cdot n_1 / (6 \cdot 10^7) \quad [kW]$$


$n_1$	Speed, driver pulley [1/min]
-------	------------------------------

### Cord tensile force, minimum belt length, belt weight

Belt width * b [mm]	16	25	32	50	75	100	150
$F_{Br}$ [N], ALPHA linear	6040	9800	13600	22640	34720	48320	72480
$F_{zul}$ [N] **, ALPHA linear	1510	2450	3400	5660	8680	12080	18120
$F_{zul}$ [N] **, ALPHA V	755	1225	1700	2830	4340	6040	9060
Minimum belt length [mm]	700	700	700	700	900	900	1100
Weight per metre [kg/m]	0.096	0.150	0.192	0.300	0.450	0.600	0.900

\* Smaller and intermediate widths possible \*\* Allowable tensile force  $F_{zul} = 25\% / 12.5\%$  (ALPHA linear / V) of cord breaking strength  $F_{Br}$

### Timing belt pulleys, idlers, clamping plates



Minimum no. of teeth of the pulleys:	$z_{min} = 18$
Minimum pitch diameter of the pulleys:	$d_{w\ min} = 57.30\text{ mm}$
Minimum no. of teeth in mesh, clamp. plate:	$z_{CP\ min} = 6$
Minimum-Ø of a plane inside idler:	$d_{min} = 52\text{ mm}$
Minimum-Ø of a plane outside idler:	$d_{min} = 120\text{ mm}$

We would be pleased to offer advice about technical characteristics and drive design as well as special requirements. Further information can be found in Optibelt documentation. © Optibelt GmbH 11/2012. Subject to technical modification and change, errors and omissions excepted.